
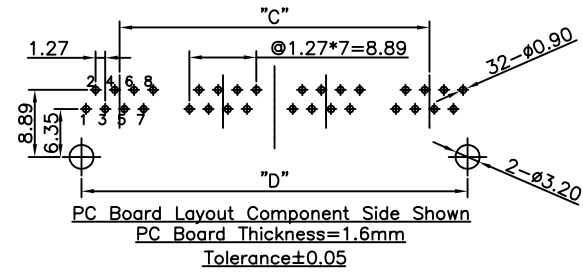
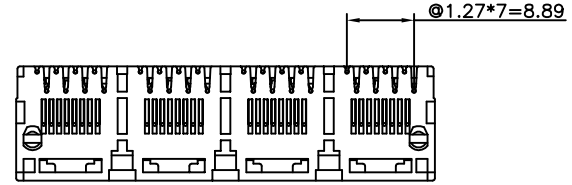


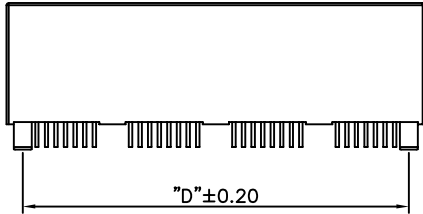
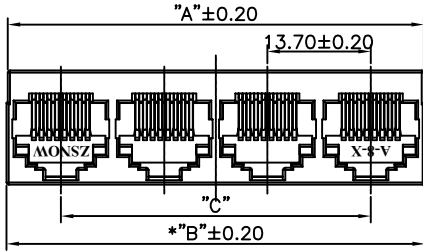


RoHS Compliant

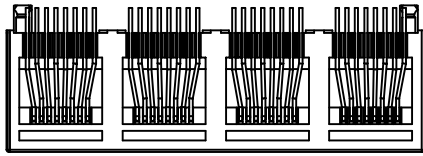

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. OPERATING: 750 CYCLES MIN.

MECHANICAL:


1. HOUSING MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. PCB RETENTION PRE-SOLDER: 1 LB MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230~240°C (3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

PART NUMBER: ZW228X-21XSXX

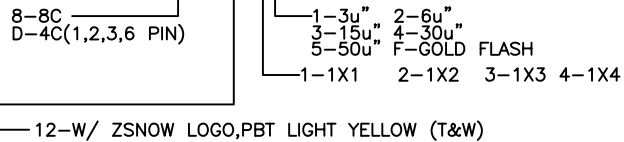

DIM	A	B	C	D
1PORT	14.10	14.40	10.10	
2PORTS	27.80	28.10	13.70	23.80
3PORTS	41.50	41.80	27.40	37.50
4PORTS	55.20	55.50	41.10	51.20

Inspection Item	DIMENSION IN mm [Inch]		ZSNOW ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER	DRAWING NUMBER
	.X±0.30 X.*± 2.0*		SEE NOTE	ZW228X-21XSXX-10
	.XX±0.20 .X*± 1.0*		TITLE	
.XXX±0.10		180° 1X4 8P		
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1
TimLee 2018.5.18	Zero,Jin 2018.5.18	Happy,Huang 2018.5.18		REV T1
		SCALE 2 : 1	SIZE A3	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM INHBO ZSNOW ELECTRONICS CO.,LTD.