

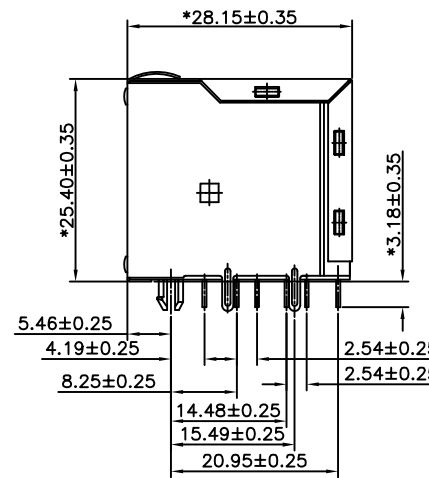


RoHS Compliant

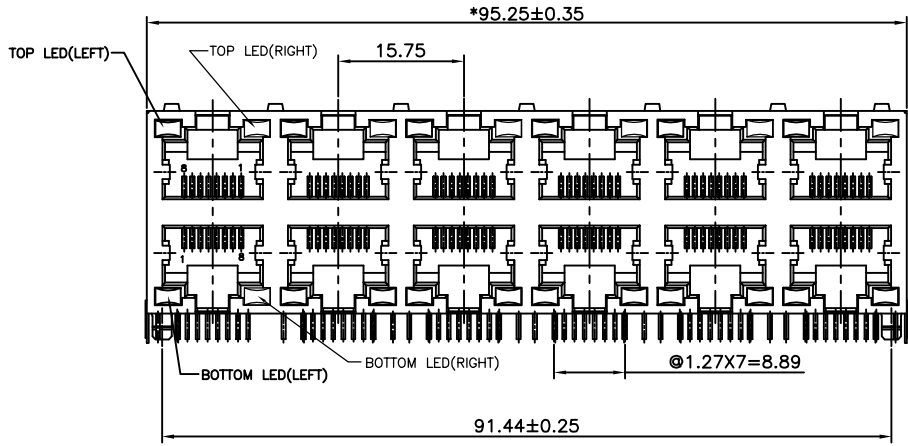

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.

MECHANICAL:


1. HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
RoHS PART NUMBER: ZW2J88-JUXXSFX

Gold Thickness:
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

06-W/O LOGO,W/ TOP TABS,BOTTOM W/O THROUGH HOLE

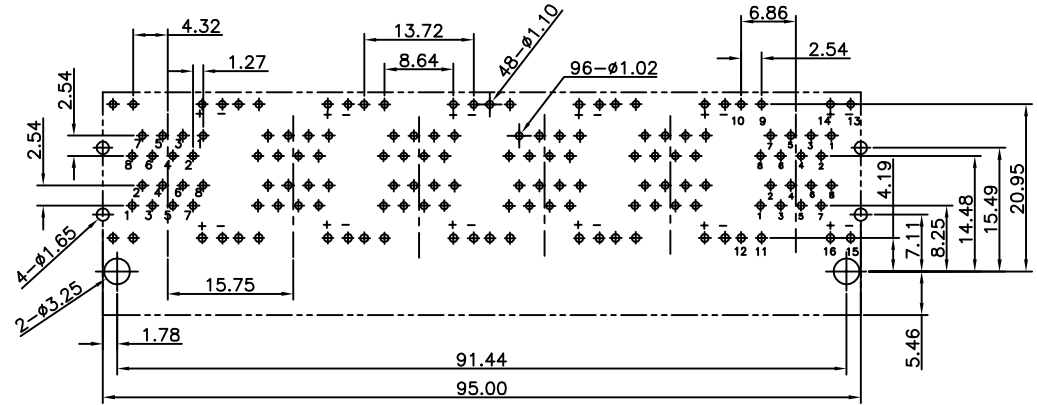

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

Inspection Item	DIMENSION IN mm [Inch]	ZSNOW ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED	PART NUMBER SEE NOTE	DRAWING NUMBER ZW2J8X-JUXXSFX-4
	.XX± 0.30 X.*± 2.0° .XX± 0.20 .X.*± 1.0° .XXX± 0.10	TITLE MINI 2X6 LED JACK	
APPROVE TIMLEE 04/02/19'	CHECK ZERO 04/02/19'	DRAW HAPPY 04/02/19'	PROJ. SHEET 1 OF 1 SCALE 4 : 1 SIZE A3 REV P1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM MEMBER ZSNOW ELECTRONICS CO.,LTD.