


网站图纸

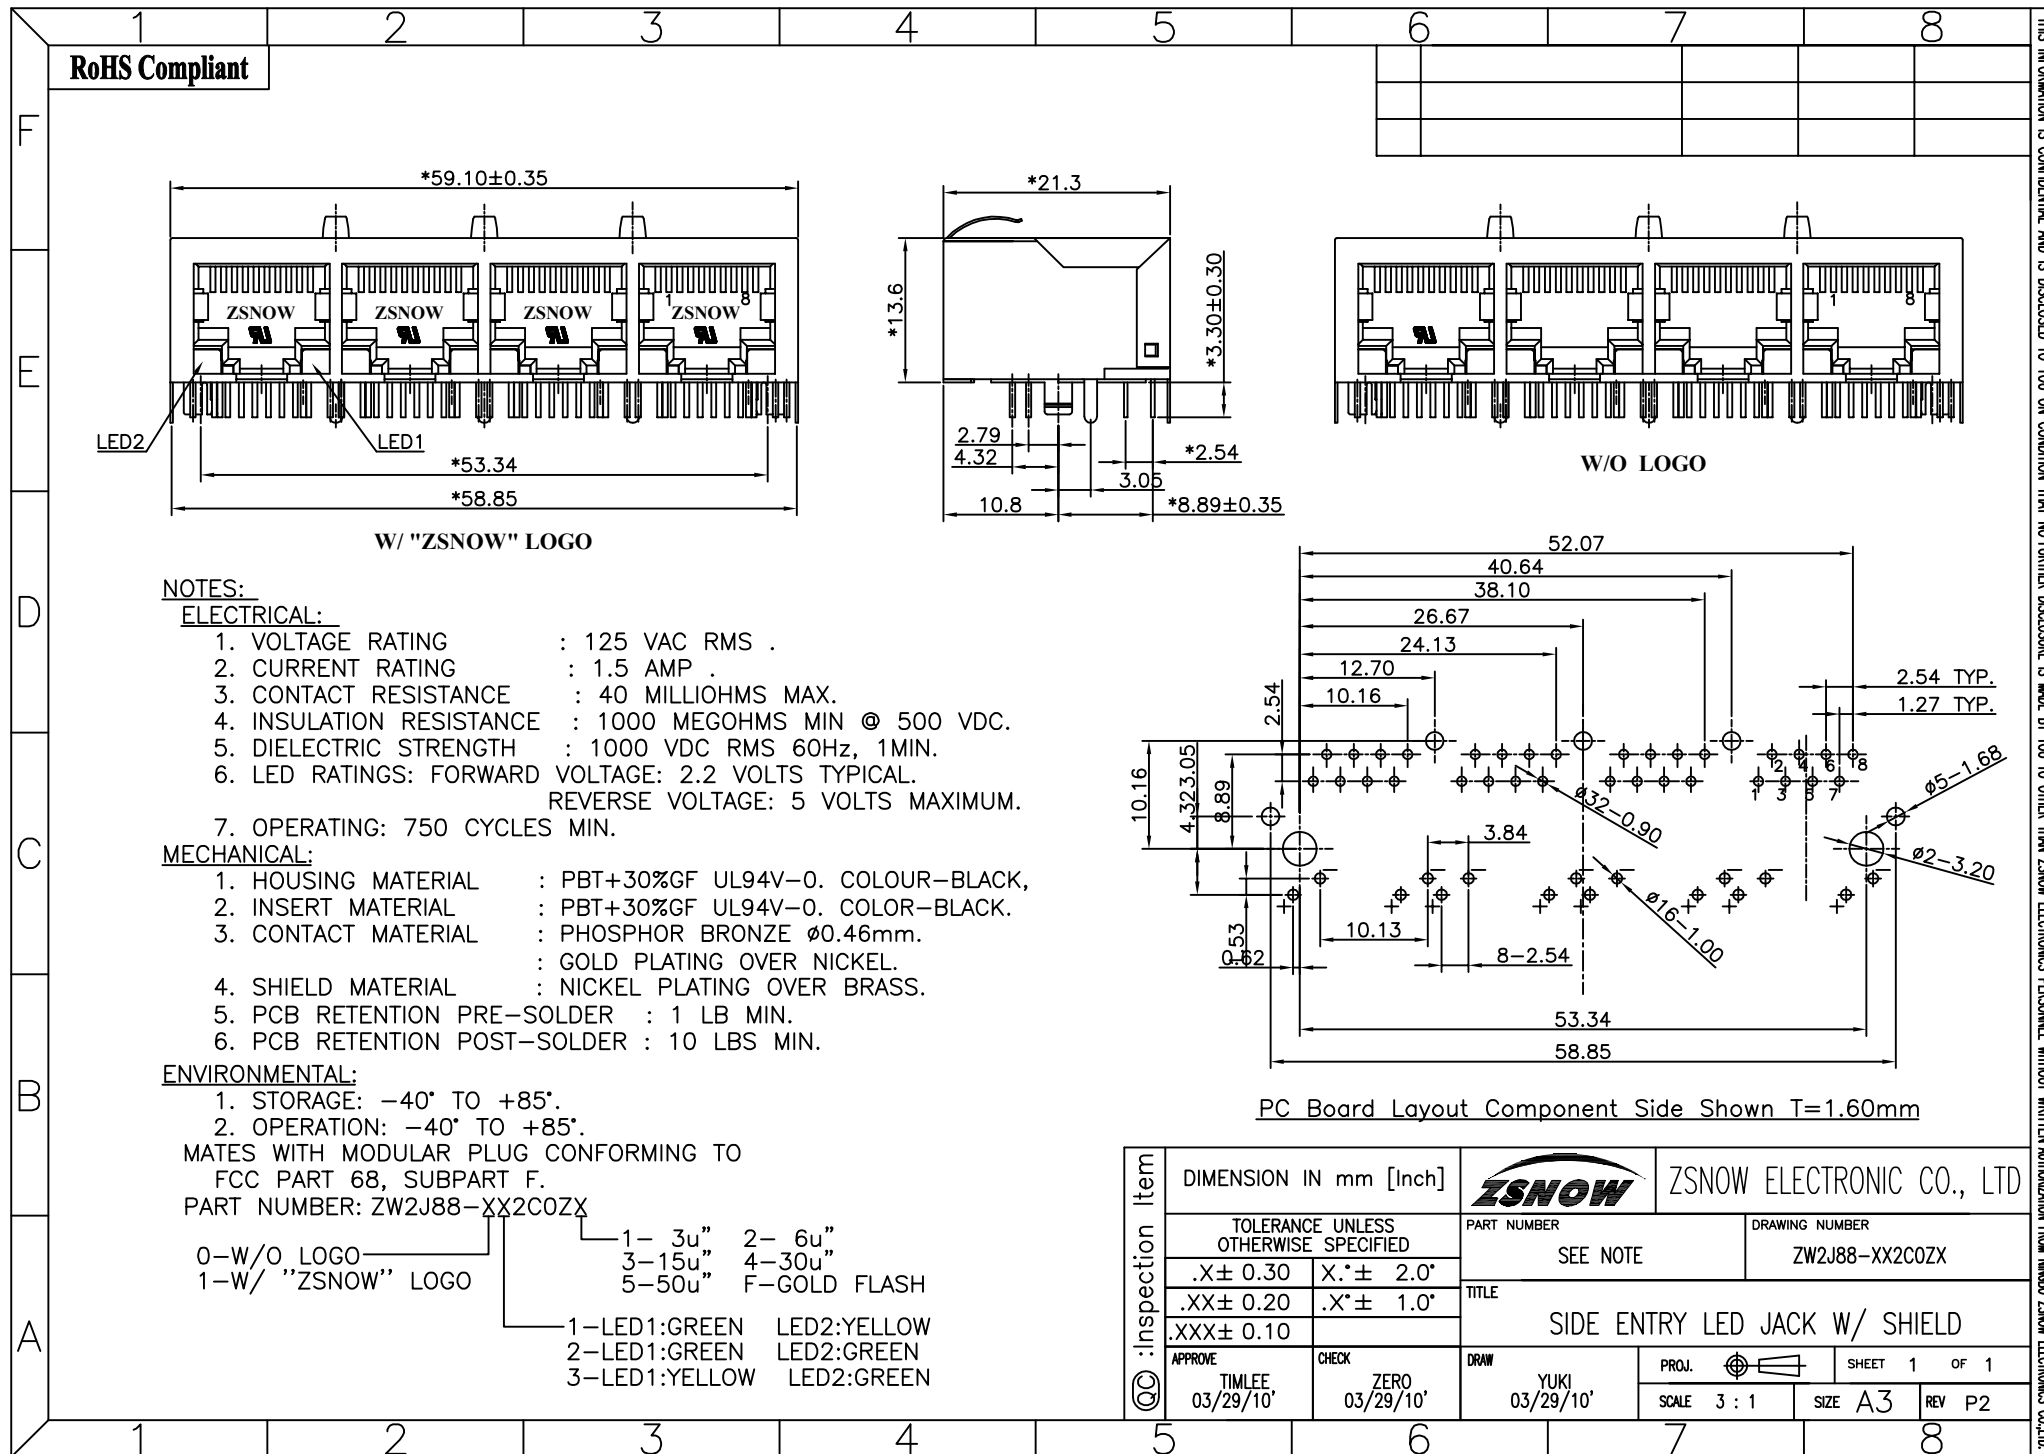

RoHS Compliant

W/ "ZSNOW" LOGO

W/O LOGO

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS .
2. CURRENT RATING : 1.5 AMP .
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
7. OPERATING: 750 CYCLES MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%GF UL94V-0. COLOUR-BLACK,
2. INSERT MATERIAL : PBT+30%GF UL94V-0. COLOR-BLACK.
3. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
: GOLD PLATING OVER NICKEL.
4. SHIELD MATERIAL : NICKEL PLATING OVER BRASS.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°.
2. OPERATION: -40° TO +85°.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: ZW2J88-XX2COZX

- | | | |
|-------------------|---------------|--------------|
| 0-W/O LOGO | 1- 3u" | 2- 6u" |
| 1-W/ "ZSNOW" LOGO | 3-15u" | 4-30u" |
| | 5-50u" | F-GOLD FLASH |
| | 1-LED1:GREEN | LED2:YELLOW |
| | 2-LED1:GREEN | LED2:GREEN |
| | 3-LED1:YELLOW | LED2:GREEN |

PC Board Layout Component Side Shown T=1.60mm

Inspection Item	DIMENSION IN mm [Inch]		ZSNOW		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER		DRAWING NUMBER	
	.X± 0.30	X.*± 2.0*	SEE NOTE		ZW2J88-XX2COZX	
	.XX± 0.20	.X.*± 1.0*	TITLE			
.XXX± 0.10		SIDE ENTRY LED JACK W/ SHIELD				
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1		
TIMLEE 03/29/10'	ZERO 03/29/10'	YUKI 03/29/10'		SCALE 3 : 1	SIZE A3	
				REV P2		

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM NINGBO ZSNOW ELECTRONICS CO.,LTD.